


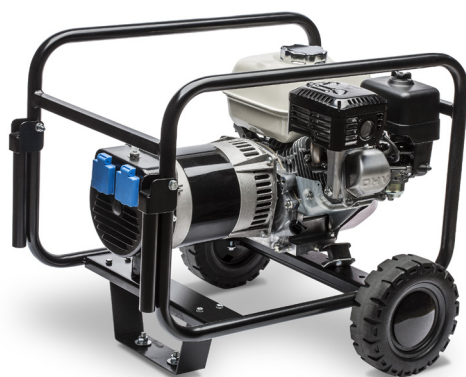


Indicative image.

Dimensions:

L : 620 mm
H : 430 mm
W: 430 mm

Weight:

36,5 kg


Hz 50 Hz

V 230 V

 Air-cooled

 Fuel

 3000 rpm

 Static Frame

 CE Conformity

1 / General description

GENERAL TECHNICAL DATA	Engine	HONDA GX 160
	Alternator	MECCALTE S15W-85/A
	Frequency	50Hz
	Voltage	230 V
	Operation regime	3000 rpm
	Power factor	1
	Fuel tank capacity	3,1 l
	Starter	manual

> Gasoline generator assembled on static / fixed tubular frame .

POWER	PRP (kVA / kW)	2,4 kVA / 1,9 kW
--------------	----------------	------------------

Regulations

ENVIRONMENTAL CONDITIONS ISO 8528-1:2005 standard: 25°C, 100kPa and 30% relative humidity:

PRIME POWER (PRP): Electrical power data available at variable load for unlimited hours per year. A 10% overload is permissible for 1 hour every 12 hours according to ISO 8528-1:2005.

EMERGENCY STANDBY POWER (ESP): Electrical power data available at variable load in an emergency according to ISO 8528-1:2005.

The DAGARTECH generator has CE marking which includes the following directives:

- 2006/42 Machinery safety
- 2006/95/CE Low Tension
- 2004/108/CE Electromagnetic compatibility
- 2000/14/CE Noise emissions in the environment outdoors.
- 2012/46/UE Measures against emission of gaseous and particulate pollutants from internal combustion engines to be installed in non-road mobile machinery



Dagartech

230V 50Hz

HONDA GX 160

DGH 3000 B

2 / Engine specifications

Engine general data

Brand/model	HONDA GX 160
Continuous Power (3000 rpm)	2,5 kW
Net Power (3600 rpm)	3,6 kW
Fuel	Gasoline
Number of cylinders	1
Cylinder capacity (cc)	163 cc
Compression ratio	8,5:1
Torque max. (Nm)	10,3 Nm (2500 rpm)
Cooling system	Air
Starter	Manual
Fuel tank capacity (l)	3,1 l
Consumption 100% load (l/h)	0,9 l/h
Consumption 75% load (l/h)	0,67 l/h
Autonomy 75% load (h)	4,63 h
Oil capacity (l)	0,6 l

> 4T OHV Air cooled gasoline engine.

3 / Alternator specifications

Alternator general data

Brand/model	MECC ALTE S15W-85A
No. poles	2
Insulation class	H
Mechanical protection degree	IP21
Voltage regulator	Regulation for capacitor
PRP power 40°C (kVA)	2,4 kVA
No.phases	1
Power factor (cos φ)	1

> Alternator 2-poles, single-phase, brushless.

4 / Sockets specifications

> Two Schukko sockets of 16A, 230V.

5 / Optionals

> Transport kit: wheels

Dimensions (with wheels):

L : 620 mm
H : 630 mm
W : 510 mm

Weight:
38,5 kg

